




## MURANO GLASS CHANDELIER

Rated power: **Max 40W**  
 Rated voltage: **110-230V**  
 Frequency: **50-60Hz**

Type lamp: **E12 ff7UbXYUVUŁ**  
 \*\*\*\*\*Protection degree: **IP20**  
 \*\*\*\*\*Safety class protection: **Class I**



**WARNING:**

- 1- Read these instructions carefully before assembly.
- 2- Please save this brochure for future reference.
- 3- We recommend that this chandelier be installed by Uqualified electrician.


The manufacturer in not responsible if the fixtures are not installed in accordance with these instructions and local Vi ]`X]b[ WXYUbXsafety standards.



; lass dUfhg UfY`YI hfYa Y`mZFU[ ]Y

**Assembly legend:**

1. Glass canopy
2. Metal canopy (to hide the wires)
3. Ring-brake with pressure screw and ring, to allow the glass canopy to smoothly adhere to the ceiling
4. Chain (length can vary), the last ring must be hooked to (5.) and closed with pliers
5. Ring by which the chandelier hangs
6. Rod (variable length) threaded at both ends
7. Glass bowl
8. Glass sphere
9. Glass body part
10. Two plastic washers and knurled metal washer to attach the metal plate
11. Upward-facing glass leaf with rings at the bottom end to allow the glass to extend straight from the metal plate
12. Flower (same configuration as 11.)
13. Downward-facing leaf (same configuration as 11.)
14. Arm (same configuration as 11.)
15. Glass shade, which must be inserted in the socket
16. Metal plate with holes - where the arms, the downward and upward leaves, and the flowers must be inserted (see detailed view below on the left)
17. Aluminum cover for the metal plate
18. Washer - to block the metal plate (see detailed view below on the right)
19. Glass bottom bowl
20. Glass ball
21. Glass finial

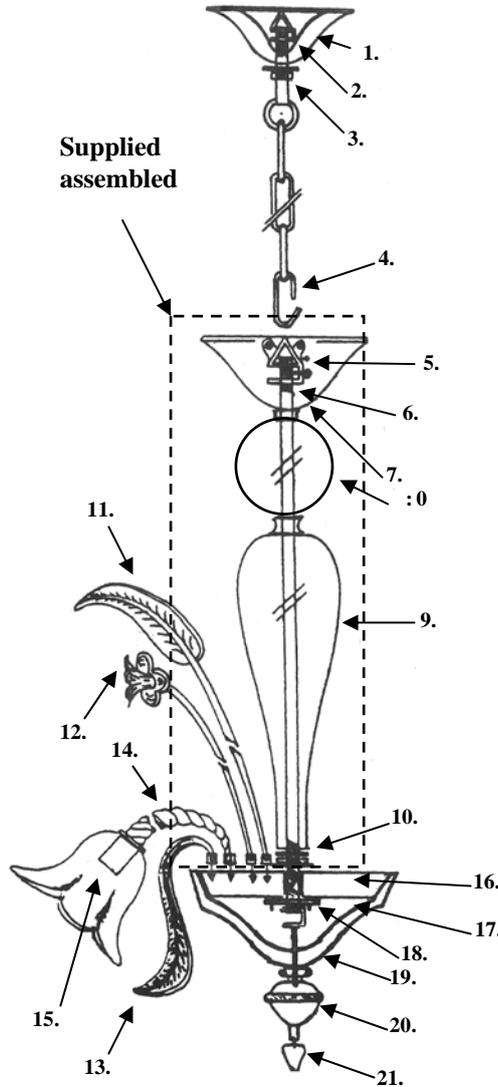

**Assembly connector instructions:**

- a) Prepare the appropriate hook in the ceiling where you want to hang the chandelier
- b) Insert and lock the GROUND cable in the clip marked with the ground symbol  $\opl�$ ;
- c) Insert and lock the LINE cable in the clip marked with the line symbol "L";
- d) Insert and lock the NEUTRAL cable in the clip marked with the neutral symbol "N";
- e) Move the canopy (1) so that it touches the ceiling and screw in the screws.


**Dwd'tgrneco gpinstructionu**

**WARNING: THE BULBS ARE VERY HOT. DON'T TOUCH UNTIL THEY COOL DOWN**

To replace bulbs:

- a) Disconnect main power;
- b) Remove the bulb and replace with one with the same technical characteristics;
- c) Reconnect main power and turn on the power switch for the chandelier;

16. /'O gcn!Rrv g
- A B B B B  
 B B B  
 A B B  
 B
- A B Holes where arms (item 14 above) must be inserted and locked by screws.  
 B B Holes where decorative components (listed in 11, 12, 13 above) must be inserted

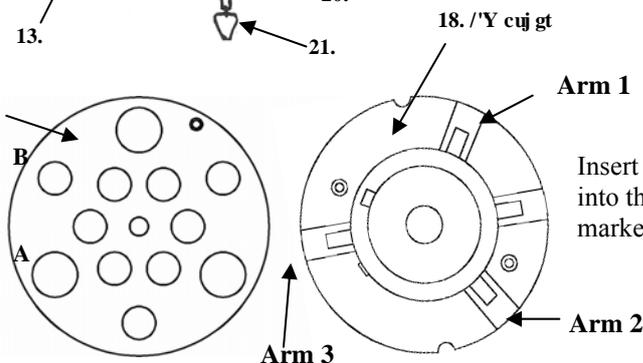

Insert the wires of lamp socket into the appropriate male plugs marked with labels (L) and (N)